



PHOTOMETRY LABORATORY

Test Report

M/s. Stanjo LED Corporation

Report No. – PM-LAB-1-1802527

Product Name – 30W STREET LIGHT/ SLC-SL30



TC - 5762



P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)


Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,
Near Sukhsagar Lane, Mahim Road, Palghar West – 401 404

Report No.: PM-LAB-1-1802527

Date : 25-02-2018

TEST DISCIPLINE : PHOTOMETRY**General Details:**

Customer / Applicant	M/s. Stanjo LED Corporation #Survey No. 279, Apuroopa Township, Quthbullapur, Jeedimetla, Rangareddy, TS, India- 500055		
Manufacturer	M/s. Stanjo LED Corporation		
Test Standard	IES LM 79-08, Clauses No.8,9,10,11 and 12		
Product Name/Model No.	30W STREET LIGHT/ SLC-SL30		
Condition of Product on receipt	Good		
Date of Receipt	19/02/2018		
Applicable Standard	IES LM 79-08, Clauses No.8,9,10,11 and 12		
Date of Testing (Start Date)	24/02/2018	End Date	24/02/2018
General ^ Ambient Condition	Temperature in °C		25 ±1°C
	Relative Humidity in %		≤70%
Test in-charge	Yogesh Chandane		

 Hardik Save Testing Officer	 Yogesh Chandane Technical Manager/ Quality Manager
Prepared By	Authorised By

Disclaimer

The issuance of this report in no way implies Listing, Classification or Recognition by PM-LAB and does not authorise the use of PM-LAB Listing, Classification or Recognition Marks or any other reference to PM-LAB on the product or system. PM-LAB authorizes the above named company to reproduce this Report provided it is reproduced in its entirety. PM-LAB 's name or marks cannot be used in any packaging, advertising, promotion, or marketing relating to the data in this Report, without PM-LAB 's prior written permission. The results of testing in this report apply only to the sample product/item, which was tested. PM-LAB has not participated in the sample selection. Other similar equipment will not necessarily produce the same results due to the production tolerance and measurement uncertainties.

^ The applicable standard ambient condition supersedes the PM-LAB general conditions and are recorded in datasheets available in the PM-LAB.

General Remarks (if any)

NIL

Description of Item Under Test (IUT)

Rated Input Voltage	Frequency	Rated Input Current	Rated Input Power
110-300V AC (HV Cut Off >300V AC)	47-63Hz	0.13A@230V	30W

Light Source		Driver / Ballast	
Make/Specifications	Quantity	Make/Specifications	Quantity
OSRAM / 1W/2835	01	STANJO 30W / OUTPUT: 45V, 0.6A	01

Summary of Test Results

Test No.	Test Parameter	Standard & Clause No.	Sample/Item No.	Result
1	Colorimetric measurements	IES LM 79-08, Clauses No.12	1802527	Evaluate by Customer
2	Electrical & Photometric Measurements	IES LM 79-08, Clauses No.8,9,10 and 11		Evaluate by Customer

Prepared by

ELECTRO-AUTO PVT. LTD.
PHOTOMETRY LAB.
PALGHAR (W)
Approved by

Test No. 01: Colorimetric Measurements**Master Equipment and Calibration Details**

Serial No.	Test Equipment	PMEA LAB Equipment ID	Calibration Date
1	Spectroradiometer	SL 300	20.04.2017
2	Measured Standard Lamp	S1520057	06.01.2018

Test Methodology Adopted

- The sample was tested according to the IES LM-79-2008.
- Orientation (burning position) of SSL product during testing was its normal burning position i.e, at zero degree inclination to horizontal.
- Colorimetric parameters were measured using an integrating sphere, a spectroradiometer and software.
- The ambient temperature was maintained at $(25 \pm 1) ^\circ\text{C}$ during testing.
- The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 240 Volts AC. It was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.


Test Observations:

Sr. No.	Particular of Test	Obtained Values			
Colorimetric Parameter					
1	Chromaticity Coordinates	x	y	u'	v'
		0.3296	0.3429	0.2043	0.4780
2	Correlated Color Temperature (K)	5624			
3	Color Rendering Index	73.0			
4	Chromaticity Difference (Duv)	+0.00217			
5	Color Ratio	Kr (%)	Kg (%)		Kb (%)
		31.3	58.8		9.9
6	Bandwidth (nm)	22.5			
7	Dominant Wavelength (nm)	529.0			
8	Purity	0.0201			
9	Color Tolerance (SDCM)	9.5486			
10	Radiant Flux (W)	6.801			


Prepared By

P. M. ELECTRO-AUTO PVT. LTD.
PHOTOMETRY LAB
Approved by

Spectral Distribution Graph

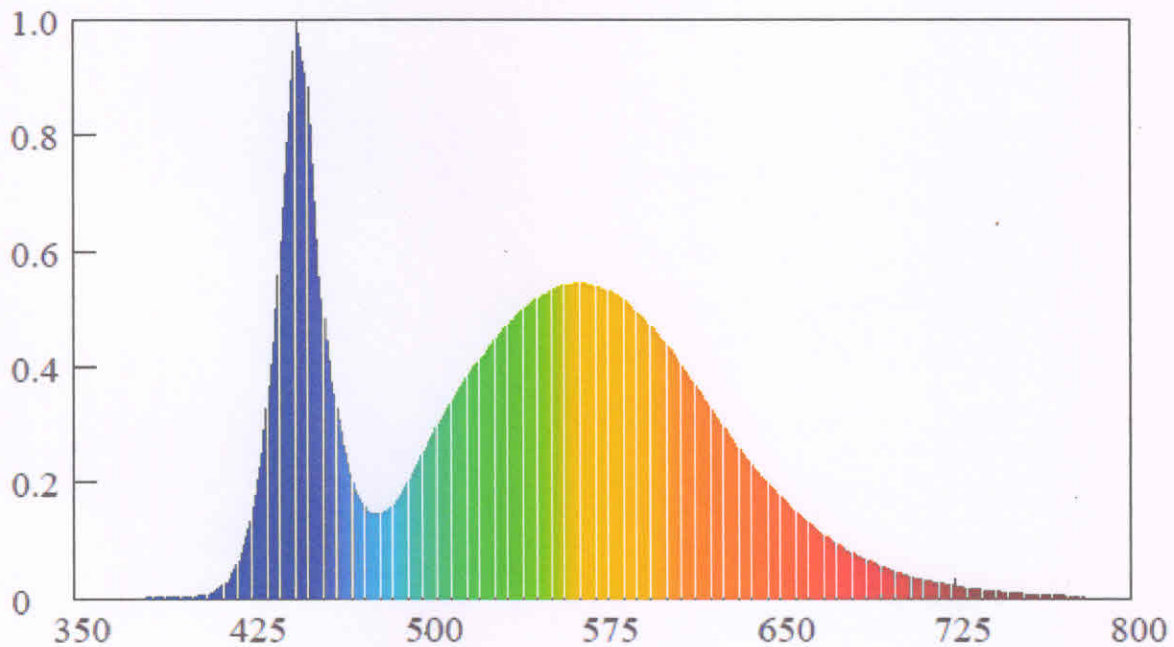

Spectral Distribution

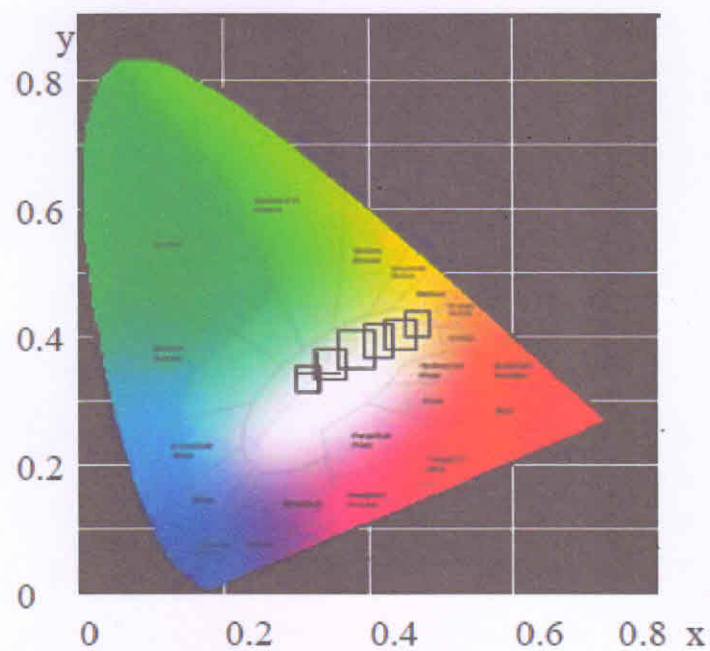

CIE1931 Chromaticity Diagram

AP
Prepared By

P. M. ELECTRO-AUTO PVT. LTD.
PALGHAR (W.)
[Signature]
Approved by

Test No. 2: Electrical and Photometric Measurements

Master Equipment and Calibration Details

Serial No.	Test Equipment	PMEA LAB Equipment ID	Calibration Date
1	Goniophotometer	GMS 3000	20.04.2017
2	Measured Standard Lamp	S10151002	06.01.2018

Test Methodology Adopted

- The sample was tested according to the IES LM-79-2008.
- The condition of the sample tested was new. Stabilization time before testing was 30 minutes.
- Orientation (burning position) of SSL product during testing was its normal burning position i.e. at zero degree inclination to horizontal.
- Photometric parameters were obtained using a Type-C Goniophotometer and software.
- Photometric distance was more than five times of the largest dimension of the test sample.
- The ambient temperature was maintained at $(25 \pm 1) ^\circ\text{C}$ during testing.
- The sample was operated at 230 Volts AC. It was stabilized before measurement. Luminous flux, Luminous Efficacy, Zonal Lumen were calculated from the software.

Test Observations:

INPUT PARAMETER				
Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
240.15	50	0.126	29.293	0.9663

OUTPUT PARAMETER			
Flux (lm)	Efficacy (lm/W)	Central Intensity (cd)	Maximum Intensity (cd)
3277.34	111.88	832.340	2127.323


Prepared by


Approved by

P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)

Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,
Near Sukhsagar Lane, Mahim Road, Palghar West – 401 404

Report No.: PM-LAB-1-1802527

Date : 25-02-2018

Zonal flux distribution table

Zone	Lumens	%Fixt
0-30	747.56	22.81%
0-40	1369.45	41.79%
0-60	2781.81	84.88%
0-90	3268.32	99.72%
0-120	3271.43	99.82%
0-180	3277.34	100.00%
60-90	825.91	25.20%
90-120	4.45	0.14%
90-130	5.96	0.18%
90-150	8.72	0.27%
90-180	10.32	0.31%
0-57.64	2621.87	80.00%



ZONAL LUMEN SUMMARY

0-10	79.62
10-20	240.88
20-30	427.05
30-40	621.89
40-50	715.14
50-60	697.22
60-70	412.77
70-80	67.24
80-90	6.50
90-100	0.87
100-110	0.96
110-120	1.28
120-130	1.51
130-140	1.51
140-150	1.25
150-160	0.92
160-170	0.54
170-180	0.14

APane
Prepared by

ELECTRO-AUTO PVT. LTD.
PHOTOMETRY LAB.
PALGHAR
Approved by
Phane

Light Distribution Curve [Unit:cd]

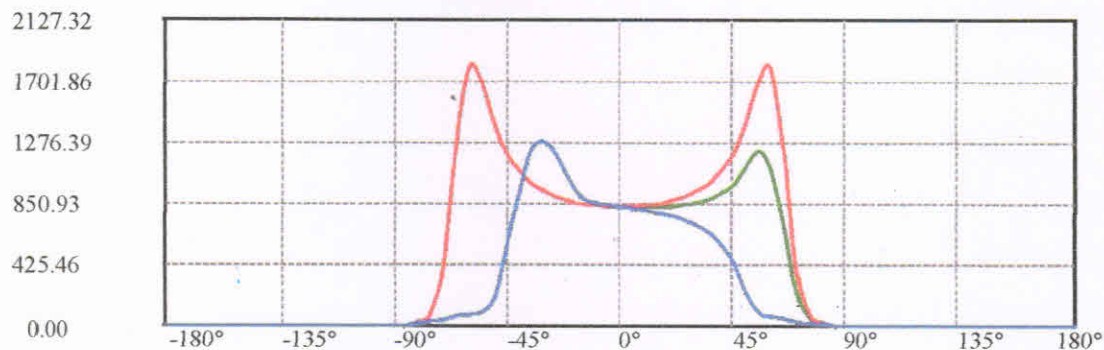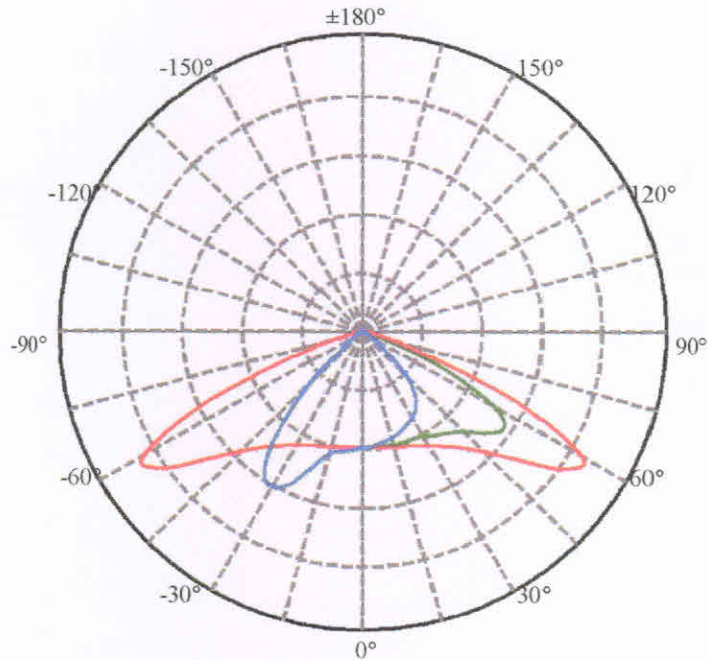

C22.5 (Max): ————

C0/C180: ————

C90/C270: ————

Field Angle (10%Imax):C0/180Left:133.5 Right: 13.5

:C90/270Left:23.4 Right:83.7

Beam Angle (50%Imax):C0/180Left:126.9 Right: 6.9

:C90/270Left:13.5 Right:65.8

Prepared by
Prepared by

Approved by
Approved by

P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)

Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,
Near Sukhsagar Lane, Mahim Road, Palghar West – 401 404

Report No.: PM-LAB-1-1802527

Date : 25-02-2018

Intensity data(cd)

C/y(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	832.34	834.24	841.84	850.87	868.68	897.90	932.82	995.29	1084.61
22.5	832.34	831.39	829.47	828.52	836.91	844.58	861.35	886.51	928.95
45.0	832.34	821.55	812.19	803.31	790.10	778.35	762.99	743.82	721.75
67.5	832.34	814.86	802.16	787.55	765.51	745.39	711.63	671.16	605.55
90.0	832.34	815.57	801.67	781.55	760.46	736.02	700.09	652.17	571.19
112.5	832.34	814.86	802.16	787.55	765.51	745.39	711.63	671.16	605.55
135.0	832.34	821.55	812.19	803.31	790.10	778.35	762.99	743.82	721.75
157.5	832.34	831.39	829.47	828.52	836.91	844.58	861.35	886.51	928.95
180.0	832.34	834.24	841.84	850.87	868.68	897.90	932.82	995.29	1084.61
202.5	832.34	842.89	848.17	862.07	895.37	933.48	992.92	1099.80	1288.65
225.0	832.34	844.33	858.25	876.94	924.92	1025.40	1213.17	1383.39	1427.72
247.5	832.34	847.68	861.08	896.27	996.15	1168.06	1299.77	1288.04	1096.20
270.0	832.34	846.72	861.09	901.82	1019.70	1195.08	1279.42	1212.81	930.57
292.5	832.34	847.68	861.08	896.27	996.15	1168.06	1299.77	1288.04	1096.20
315.0	832.34	844.33	858.25	876.94	924.92	1025.40	1213.17	1383.39	1427.72
337.5	832.34	842.89	848.17	862.07	895.37	933.48	992.92	1099.80	1288.65
360.0	832.34	834.24	841.84	850.87	868.68	897.90	932.82	995.29	1084.61
C/y(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	1199.58	1414.31	1707.91	1790.10	1191.50	413.32	78.39	20.43	5.46
22.5	997.50	1109.91	1213.24	1086.26	671.69	238.82	47.96	7.91	1.92
45.0	685.05	598.69	393.87	150.01	66.65	36.92	18.94	7.19	1.44
67.5	500.91	310.05	121.85	67.04	47.89	32.56	19.63	8.38	1.44
90.0	431.74	226.17	92.00	65.65	47.92	31.63	18.21	8.63	0.96
112.5	500.91	310.05	121.85	67.04	47.89	32.56	19.63	8.38	1.44
135.0	685.05	598.69	393.87	150.01	66.65	36.92	18.94	7.19	1.44
157.5	997.50	1109.91	1213.24	1086.26	671.69	238.82	47.96	7.91	1.92
180.0	1199.58	1414.31	1707.91	1790.10	1191.50	413.32	78.39	20.43	5.46
202.5	1553.94	1864.11	2127.32	1971.25	1176.17	333.51	92.01	25.39	5.51
225.0	1350.01	1066.56	539.26	216.77	101.69	63.56	44.61	20.87	6.00
247.5	658.01	281.85	112.79	82.37	64.89	51.49	33.53	17.48	6.95
270.0	516.08	189.76	98.71	77.15	60.38	45.04	29.71	16.29	4.79
292.5	658.01	281.85	112.79	82.37	64.89	51.49	33.53	17.48	6.95
315.0	1350.01	1066.56	539.26	216.77	101.69	63.56	44.61	20.87	6.00
337.5	1553.94	1864.11	2127.32	1971.25	1176.17	333.51	92.01	25.39	5.51
360.0	1199.58	1414.31	1707.91	1790.10	1191.50	413.32	78.39	20.43	5.46
C/y(°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	1.66	1.19	1.19	1.19	1.66	2.14	2.38	2.38	2.85
22.5	0.96	0.96	0.96	1.44	1.44	1.92	2.16	2.16	2.40
45.0	0.72	0.48	0.72	0.96	0.96	1.44	1.68	2.16	2.16
67.5	0.72	0.72	0.72	0.48	0.48	0.96	0.96	1.20	1.68
90.0	0.48	0.48	0.48	0.48	0.48	0.48	0.96	0.96	1.44
112.5	0.72	0.72	0.72	0.48	0.48	0.96	0.96	1.20	1.68
135.0	0.72	0.48	0.72	0.96	0.96	1.44	1.68	2.16	2.16
157.5	0.96	0.96	0.96	1.44	1.44	1.92	2.16	2.16	2.40
180.0	1.66	1.19	1.19	1.19	1.66	2.14	2.38	2.38	2.85
202.5	1.44	0.96	0.96	1.20	1.44	1.44	1.92	1.92	2.16
225.0	0.96	0.72	0.48	0.96	0.96	0.96	1.20	1.44	1.68
247.5	0.72	0.48	0.48	0.72	0.72	0.96	0.96	0.96	1.20
270.0	0.48	0.48	0.48	0.48	0.48	0.96	0.96	0.96	0.96
292.5	0.72	0.48	0.48	0.72	0.72	0.96	0.96	0.96	1.20
315.0	0.96	0.72	0.48	0.96	0.96	0.96	1.20	1.44	1.68
337.5	1.44	0.96	0.96	1.20	1.44	1.44	1.92	1.92	2.16
360.0	1.66	1.19	1.19	1.19	1.66	2.14	2.38	2.38	2.85

Prepared by

P. M. ELECTRO-AUTO PVT. LTD.
PHOTOMETRY LAB.
Approved by

*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting

Intensity data(cd)

C/y(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0	180.0
0.0	2.38	2.38	2.38	2.38	2.14	1.90	1.90	1.90	2.14	1.90
22.5	2.40	2.40	2.16	2.40	2.16	2.16	1.92	1.92	1.92	1.92
45.0	2.16	1.92	2.16	2.16	2.16	1.92	1.92	1.92	1.92	1.92
67.5	1.92	2.15	2.15	2.15	2.16	1.92	1.92	1.92	1.92	1.92
90.0	1.44	1.92	2.40	2.40	1.92	2.40	1.92	1.92	1.92	1.92
112.5	1.92	2.15	2.15	2.15	2.16	1.92	1.92	1.92	1.92	1.92
135.0	2.16	1.92	2.16	2.16	2.16	1.92	1.92	1.92	1.92	1.92
157.5	2.40	2.40	2.16	2.40	2.16	2.16	1.92	1.92	1.92	1.92
180.0	2.38	2.38	2.38	2.38	2.14	1.90	1.90	1.90	2.14	1.90
202.5	2.16	2.16	1.92	1.92	1.92	1.92	1.92	1.68	1.92	1.92
225.0	1.68	1.68	1.44	1.92	1.92	1.92	1.68	1.92	1.92	1.92
247.5	1.44	1.44	1.68	1.68	1.68	1.68	1.92	1.92	1.92	1.92
270.0	1.44	1.44	1.44	1.44	1.44	1.92	1.92	1.92	1.92	1.92
292.5	1.44	1.44	1.68	1.68	1.68	1.68	1.92	1.92	1.92	1.92
315.0	1.68	1.68	1.44	1.92	1.92	1.92	1.68	1.92	1.92	1.92
337.5	2.16	2.16	1.92	1.92	1.92	1.92	1.92	1.68	1.92	1.92
360.0	2.38	2.38	2.38	2.38	2.14	1.90	1.90	1.90	2.14	1.90

Photographs



***** End of Report *****

AB
Prepared by

Chandana
Approved by