



## Test Report

**M/s. Stanjo LED Corporation**

**Report No. – PM-LAB-1-1802530**

**Product Name – 40W TUBE LIGHT/ SLC-TL40**



**P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)**



Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,  
Near Sukhsagar Lane, Mahim Road, Palghar West - 401 404

Report No.: PM-LAB-1-1802530

Date : 26-02-2018

**TEST DISCIPLINE : PHOTOMETRY****General Details:**

Customer / Applicant	M/s. Stanjo LED Corporation #Survey No. 279, Apuroopa Township, Quthbullapur, Jeedimetla, Rangareddy, TS, India- 500055		
Manufacturer	M/s. Stanjo LED Corporation		
Test Standard	IES LM 79-08, Clauses No.8,9,10,11 and 12		
Product Name/Model No.	40W TUBE LIGHT/ SLC-TL40		
Condition of Product on receipt	Good		
Date of Receipt	19/02/2018		
Applicable Standard	IES LM 79-08, Clauses No.8,9,10,11 and 12		
Date of Testing (Start Date)	22/02/2018	End Date	22/02/2018
General ^ Ambient Condition	Temperature in °C	25 ±1°C	
	Relative Humidity in %	≤70%	
Test in-charge	Yogesh Chandane		

 Harshik Save Testing Officer	 Yogesh Chandane Technical Manager/ Quality Manager
<b>Prepared By</b>	<b>Authorised By</b>

**Disclaimer**

The issuance of this report in no way implies Listing, Classification or Recognition by PM-LAB and does not authorise the use of PM-LAB Listing, Classification or Recognition Marks or any other reference to PM-LAB on the product or system. PM-LAB authorizes the above named company to reproduce this Report provided it is reproduced in its entirety. PM-LAB 's name or marks cannot be used in any packaging, advertising, promotion, or marketing relating to the data in this Report, without PM-LAB 's prior written permission. The results of testing in this report apply only to the sample product/item, which was tested. PM-LAB has not participated in the sample selection. Other similar equipment will not necessarily produce the same results due to the production tolerance and measurement uncertainties.

^ The applicable standard ambient condition supersedes the PM-LAB general conditions and are recorded in datasheets available in the PM-LAB.

**P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)**

Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,  
Near Sukhsagar Lane, Mahim Road, Palghar West - 401 404

Report No.: PM-LAB-1-1802530

Date: 26-02-2018

**General Remarks (if any)**

NIL

**Description of Item Under Test (IUT)**

Rated Input Voltage	Frequency	Rated Input Current	Rated Input Power
110-300V AC (HV Cut Off >300V AC)	47-63Hz	0.17A@230V	40W

Light Source		Driver / Ballast	
Make/Specifications	Quantity	Make/Specifications	Quantity
SAMSUNG/ 3V, 0.2W, 2835 SMD PACKAGE	01	STANJO/ 30W, OUTPUT: 72VDC, 0.48A	01

**Summary of Test Results**

Test No.	Test Parameter	Standard & Clause No.	Sample/Item No.	Result
1	Colorimetric measurements	IES LM 79-08, Clauses No.12	1802530	Evaluate by Customer
2	Electrical & Photometric Measurements	IES LM 79-08, Clauses No.8,9,10 and 11		Evaluate by Customer

*A. K. K.*  
Prepared by

*A. K. K.*  
Approved by  
P. M. ELECTRO-AUTO PVT. LTD.  
PHOTOMETRY LAB  
PALGHAR



**Test No. 01: Colorimetric Measurements****Master Equipment and Calibration Details**

Serial No.	Test Equipment	PMEA LAB Equipment ID	Calibration Date
1	Spectroradiometer	SL 300	20.04.2017
2	Measured Standard Lamp	S1520057	06.01.2018

**Test Methodology Adopted**

- The sample was tested according to the IES LM-79-2008.
- Orientation (burning position) of SSL product during testing was its normal burning position i.e, at zero degree inclination to horizontal.
- Colorimetric parameters were measured using an integrating sphere, a spectroradiometer and software.
- The ambient temperature was maintained at  $(25 \pm 1) ^\circ\text{C}$  during testing.
- The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 230 Volts AC. It was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.


**Test Observations:**

Sr. No.	Particular of Test	Obtained Values			
Colorimetric Parameter					
1	Chromaticity Coordinates	x	y	u'	v'
		0.3158	0.3353	0.1976	0.4721
2	Correlated Color Temperature (K)	6302			
3	Color Rendering Index	82.8			
4	Chromaticity Differnce (Duv)	+0.00485			
5	Color Ratio	Kr (%)	Kg (%)		Kb (%)
		30.1	57.0		12.9
6	Bandwidth (nm)	24.4			
7	Dominant Wavelength (nm)	493.0			
8	Purity	0.0581			
9	Color Tolerance (SDCM)	3.4425			
10	Radiant Flux (W)	10.625			


  
Prepared By

  
Approved by

### Spectral Distribution Graph

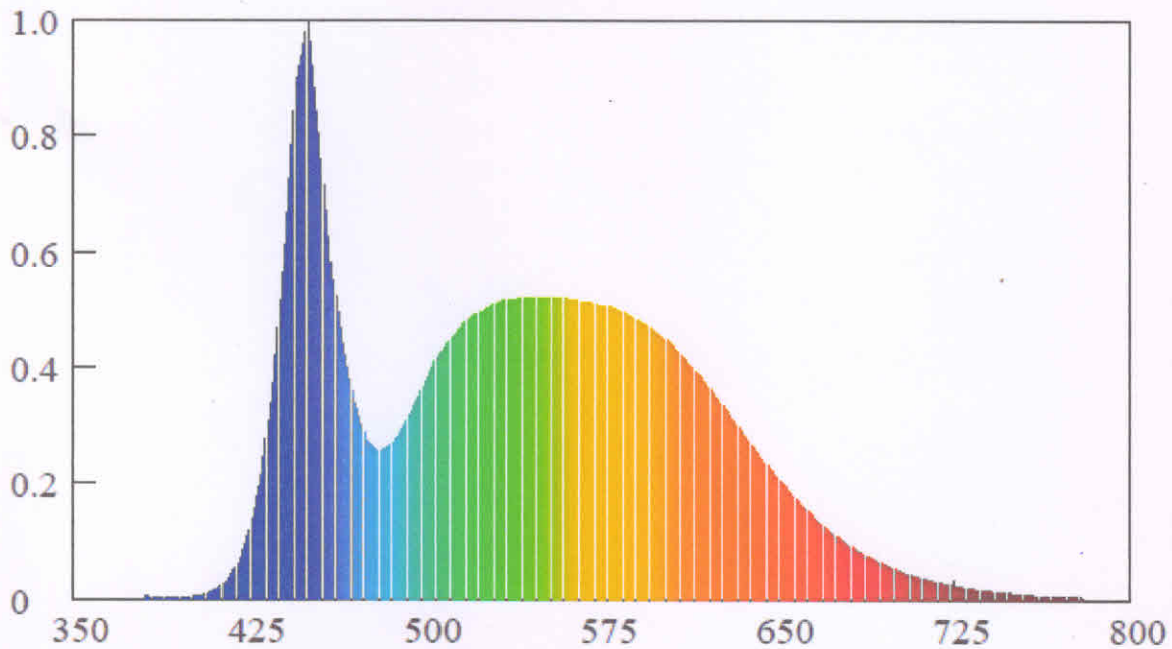

### Spectral Distribution

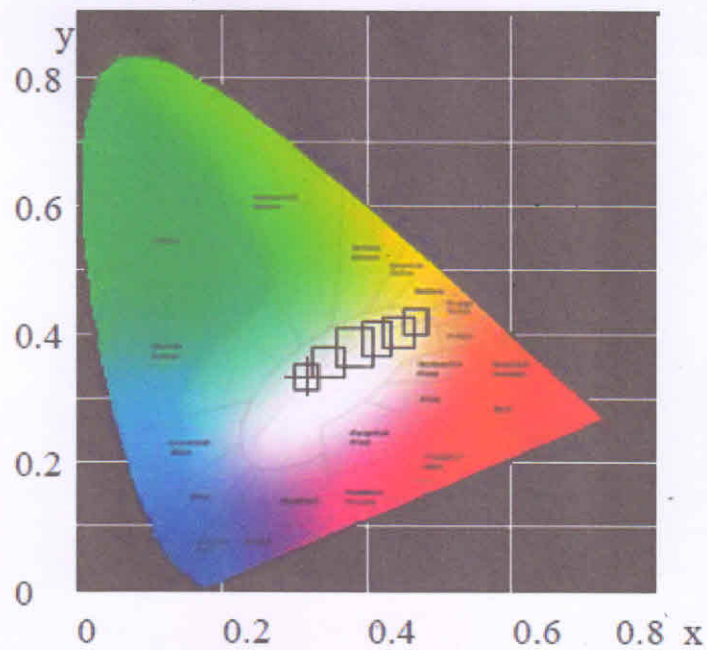

### CIE1931 Chromaticity Diagram

*Prepared By*  
Prepared By

*Approved by*  
Approved by



## Test No. 2: Electrical and Photometric Measurements

### Master Equipment and Calibration Details

Serial No.	Test Equipment	PMEA LAB Equipment ID	Calibration Date
1	Goniophotometer	GMS 3000	20.04.2017
2	Measured Standard Lamp	S10151002	06.01.2018

### Test Methodology Adopted

- The sample was tested according to the IES LM-79-2008.
- The condition of the sample tested was new. Stabilization time before testing was 30 minutes.
- Orientation (burning position) of SSL product during testing was its normal burning position i.e. at zero degree inclination to horizontal.
- Photometric parameters were obtained using a Type-C Goniophotometer and software.
- Photometric distance was more than five times of the largest dimension of the test sample.
- The ambient temperature was maintained at  $(25 \pm 1) ^\circ\text{C}$  during testing.
- The sample was operated at 230 Volts AC. It was stabilized before measurement. Luminous flux, Luminous Efficacy, Zonal Lumen were calculated from the software.

### Test Observations:



INPUT PARAMETER				
Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
230.20	50	0.1760	39.70	0.9814

OUTPUT PARAMETER			
Flux (lm)	Efficacy (lm/W)	Central Intensity (cd)	Maximum Intensity (cd)
4483.20	112.93	1502.089	1504.217

  
Prepared by

  
Approved by

**Light Distribution Curve [Unit:cd]**

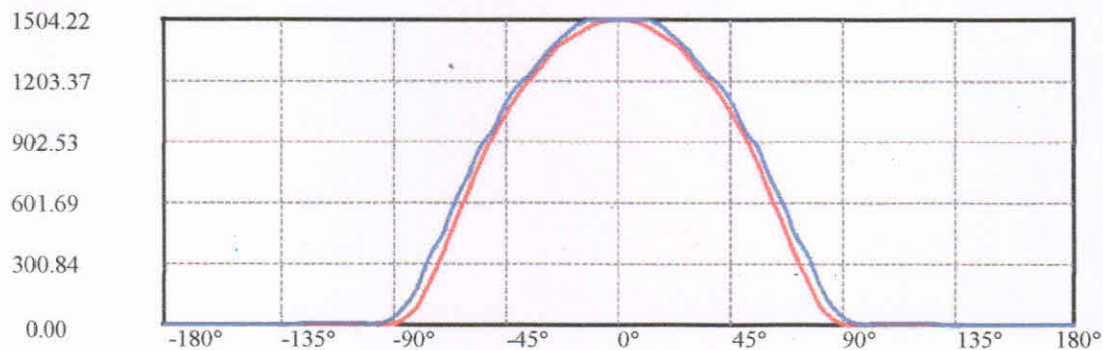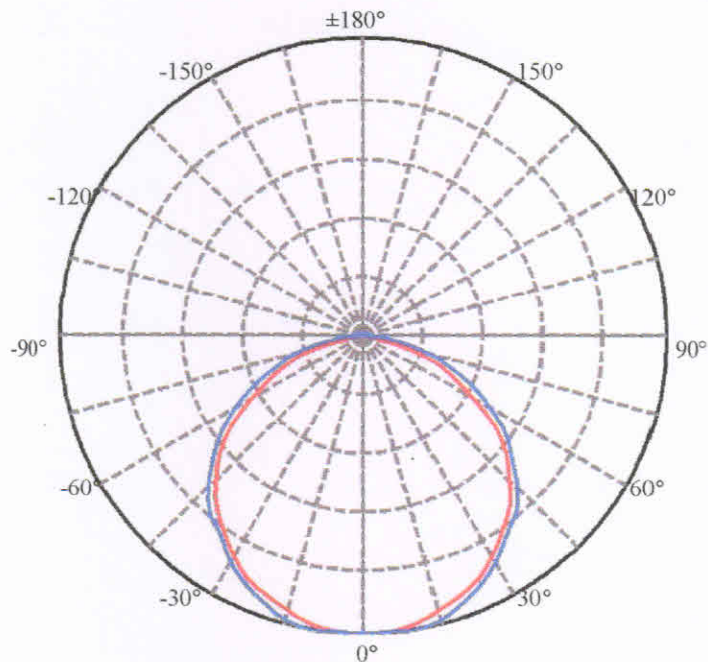

C90 (Max): —————

C0/C180: —————

C90/C270: —————

Field Angle (10%Imax):C0/180Left:77.4 Right: 77.4

:C90/270Left:91.8 Right:71.8

Beam Angle (50%Imax):C0/180Left:56.4 Right: 56.4

:C90/270Left:69.2 Right:49.2

*Prepared by*  
Prepared by

*Approved by*  
Approved by



**P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)**Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,  
Near Sukhsagar Lane, Mahim Road, Palghar West - 401 404

Report No.: PM-LAB-1-1802530

Date : 26-02-2018

**Intensity data(cd)**

C/y(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	1502.09	1497.70	1478.79	1440.50	1399.52	1352.69	1282.80	1209.26	1127.79
22.5	1502.09	1494.71	1477.78	1447.18	1407.15	1361.80	1298.31	1222.96	1141.80
45.0	1502.09	1499.82	1490.15	1464.62	1423.12	1367.66	1302.29	1224.76	1127.08
67.5	1502.09	1500.87	1498.96	1475.28	1433.46	1377.81	1306.52	1220.02	1144.00
90.0	1502.09	1504.22	1504.22	1485.54	1441.08	1387.16	1315.98	1232.51	1174.34
112.5	1502.09	1500.87	1498.96	1475.28	1433.46	1377.81	1306.52	1220.02	1144.00
135.0	1502.09	1499.82	1490.15	1464.62	1423.12	1367.66	1302.29	1224.76	1127.08
157.5	1502.09	1494.71	1477.78	1447.18	1407.15	1361.80	1298.31	1222.96	1141.80
180.0	1502.09	1497.70	1478.79	1440.50	1399.52	1352.69	1282.80	1209.26	1127.79
202.5	1502.09	1494.71	1477.78	1447.18	1407.15	1361.80	1298.31	1222.96	1141.80
225.0	1502.09	1499.82	1490.15	1464.62	1423.12	1367.66	1302.29	1224.76	1127.08
247.5	1502.09	1500.87	1498.96	1475.28	1433.46	1377.81	1306.52	1220.02	1144.00
270.0	1502.09	1504.22	1504.22	1485.54	1441.08	1387.16	1315.98	1232.51	1174.34
292.5	1502.09	1500.87	1498.96	1475.28	1433.46	1377.81	1306.52	1220.02	1144.00
315.0	1502.09	1499.82	1490.15	1464.62	1423.12	1367.66	1302.29	1224.76	1127.08
337.5	1502.09	1494.71	1477.78	1447.18	1407.15	1361.80	1298.31	1222.96	1141.80
360.0	1502.09	1497.70	1478.79	1440.50	1399.52	1352.69	1282.80	1209.26	1127.79
C/y(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	1031.80	925.45	791.90	643.72	497.36	348.32	205.75	90.74	25.86
22.5	1047.83	938.50	807.04	659.13	540.37	398.74	276.35	139.32	67.97
45.0	1026.18	947.70	836.42	699.49	586.55	428.16	293.64	191.19	75.50
67.5	1074.95	946.78	850.68	729.47	578.39	437.74	316.01	187.71	83.54
90.0	1086.84	960.56	869.99	730.71	593.32	452.85	333.90	187.05	84.89
112.5	1074.95	946.78	850.68	729.47	578.39	437.74	316.01	187.71	83.54
135.0	1026.18	947.70	836.42	699.49	586.55	428.16	293.64	191.19	75.50
157.5	1047.83	938.50	807.04	659.13	540.37	398.74	276.35	139.32	67.97
180.0	1031.80	925.45	791.90	643.72	497.36	348.32	205.75	90.74	25.86
202.5	1047.83	938.50	807.04	659.13	540.37	398.74	276.35	139.32	67.97
225.0	1026.18	947.70	836.42	699.49	586.55	428.16	293.64	191.19	75.50
247.5	1074.95	946.78	850.68	729.47	578.39	437.74	316.01	187.71	83.54
270.0	1086.84	960.56	869.99	730.71	593.32	452.85	333.90	187.05	84.89
292.5	1074.95	946.78	850.68	729.47	578.39	437.74	316.01	187.71	83.54
315.0	1026.18	947.70	836.42	699.49	586.55	428.16	293.64	191.19	75.50
337.5	1047.83	938.50	807.04	659.13	540.37	398.74	276.35	139.32	67.97
360.0	1031.80	925.45	791.90	643.72	497.36	348.32	205.75	90.74	25.86
C/y(°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	4.15	1.59	1.46	1.46	1.46	1.46	1.95	1.95	2.07
22.5	18.26	8.83	7.01	5.20	4.11	3.27	2.54	2.18	2.30
45.0	22.78	10.97	10.38	9.30	7.87	6.56	5.49	4.65	3.82
67.5	24.89	11.61	10.31	9.01	8.30	7.23	6.16	5.21	4.74
90.0	25.30	11.11	9.46	8.04	7.33	6.38	5.44	4.97	4.26
112.5	24.89	11.61	10.31	9.01	8.30	7.23	6.16	5.21	4.74
135.0	22.78	10.97	10.38	9.30	7.87	6.56	5.49	4.65	3.82
157.5	18.26	8.83	7.01	5.20	4.11	3.27	2.54	2.18	2.30
180.0	4.15	1.59	1.46	1.46	1.46	1.46	1.95	1.95	2.07
202.5	18.26	8.83	7.01	5.20	4.11	3.27	2.54	2.18	2.30
225.0	22.78	10.97	10.38	9.30	7.87	6.56	5.49	4.65	3.82
247.5	24.89	11.61	10.31	9.01	8.30	7.23	6.16	5.21	4.74
270.0	25.30	11.11	9.46	8.04	7.33	6.38	5.44	4.97	4.26
292.5	24.89	11.61	10.31	9.01	8.30	7.23	6.16	5.21	4.74
315.0	22.78	10.97	10.38	9.30	7.87	6.56	5.49	4.65	3.82
337.5	18.26	8.83	7.01	5.20	4.11	3.27	2.54	2.18	2.30
360.0	4.15	1.59	1.46	1.46	1.46	1.46	1.95	1.95	2.07

Prepared by  
*A. K. Kulkarni*P. M. ELECTRO-AUTO PVT. LTD.  
PHOTOMETRY LAB  
PALGHAR  
Approved by  
*[Signature]*



**P. M. Electro - Auto Pvt. Ltd. (Photometry Laboratory)**


Survey No.102/1/2 Nagar Parishad House, Opp. ISKCON Food Relief Foundation,  
Near Sukhsagar Lane, Mahim Road, Palghar West - 401 404

Report No.: PM-LAB-1-1802530

Date : 26-02-2018

**Intensity data(cd)**

C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0	180.0
0.0	2.07	2.44	2.44	2.44	2.44	2.44	2.44	2.44	2.93	2.93
22.5	2.18	2.30	2.42	2.42	2.42	2.54	2.42	2.42	2.78	2.90
45.0	3.22	2.62	2.50	2.39	2.39	2.39	2.39	2.50	2.74	2.86
67.5	4.27	3.56	2.96	2.61	2.37	2.37	2.61	2.37	2.72	2.84
90.0	4.02	3.78	3.07	2.60	2.36	2.60	2.36	2.84	2.60	2.84
112.5	4.27	3.56	2.96	2.61	2.37	2.37	2.61	2.37	2.72	2.84
135.0	3.22	2.62	2.50	2.39	2.39	2.39	2.39	2.50	2.74	2.86
157.5	2.18	2.30	2.42	2.42	2.42	2.54	2.42	2.42	2.78	2.90
180.0	2.07	2.44	2.44	2.44	2.44	2.44	2.44	2.44	2.93	2.93
202.5	2.18	2.30	2.42	2.42	2.42	2.54	2.42	2.42	2.78	2.90
225.0	3.22	2.62	2.50	2.39	2.39	2.39	2.39	2.50	2.74	2.86
247.5	4.27	3.56	2.96	2.61	2.37	2.37	2.61	2.37	2.72	2.84
270.0	4.02	3.78	3.07	2.60	2.36	2.60	2.36	2.84	2.60	2.84
292.5	4.27	3.56	2.96	2.61	2.37	2.37	2.61	2.37	2.72	2.84
315.0	3.22	2.62	2.50	2.39	2.39	2.39	2.39	2.50	2.74	2.86
337.5	2.18	2.30	2.42	2.42	2.42	2.54	2.42	2.42	2.78	2.90
360.0	2.07	2.44	2.44	2.44	2.44	2.44	2.44	2.44	2.93	2.93

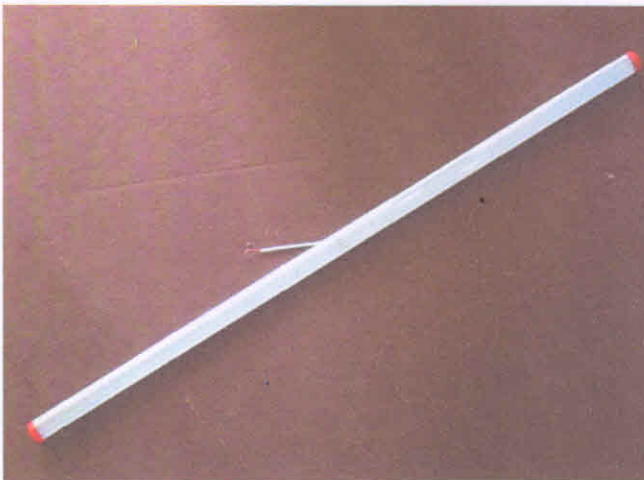**Photographs**

\*\*\*\*\* End of Report \*\*\*\*\*

*Arave*  
Prepared by

ELECTRO-AUTO PVT. LTD.  
PHOTOMETRY LAB  
*Arave*  
Approved by

\*All Results in accordance to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting